



OUTDOOR SOLUTIONS

# LED VIDEO SCREEN PR

## OUTDOOR SOLUTIONS

### Key Features:

- Die-casting Aluminum module for fast heat dissipation.
- IP66 waterproof and 5VB fireproof.
- Common cathode technology for energy saving.
- High brightness option for 10,000nits.
- Totally front and rear service.
- Stable and reliable performance.




Standard Dimension: 960x960x90mm  
 Optional Dimensions: 960x640mm/960x1,280mm/1,440x960mm/  
 1,440x640mm  
 Pixel pitch: 5.71mm, 6.67mm, 8mm, 10mm  
 Applications: Digital signage, billboard, road sign, stadium scoreboards,  
 building facade,etc.



Die-casting Aluminum Module for fast heat dissipation



Hidden cable cover, protect the power cable and signal cable from damages.

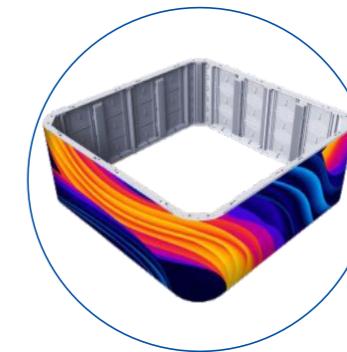

Perfect seamless corner cabinet for naked-eye 3D solution.



Die-casting connecting plate, for wall-mount installation directly.

| Item Number                  | P5.7                                       | P6.67        | P8              | P10             |
|------------------------------|--------------------------------------------|--------------|-----------------|-----------------|
| Pixel Pitch(mm)              | 5.71                                       | 6.67         | 8               | 10              |
| Pixel Density(dots/SQM)      | 30,625                                     | 22,500       | 15,625          | 10,000          |
| LED Type                     | SMD2727                                    | SMD2727      | SMD2727/SMD3535 | SMD2727/SMD3535 |
| Module Resolution(pixels)    | 84*56                                      | 72*48        | 60*40           | 48*32           |
| Module Size(mm)              | 480*320                                    | 480*320      | 480*320         | 480*320         |
| Cabinet Size(mm)             | 960*1280/1440*960/960*960/1440*640/960*640 |              |                 |                 |
| Cabinet Weight(KG/SQM)       | 30                                         | 30           | 30              | 30              |
| Brightness(Nits)             | 6,000-9,000                                | 6,000-10,000 | 6,000-10,000    | 6,000-10,000    |
| Refreshment(Hz)              | 3,840                                      | 3,840        | 3,840           | 3,840           |
| Grey Scale(Bit)              | 14-16                                      | 14-16        | 14-16           | 14-16           |
| Max Power Consumption(W/SQM) | 580±3%                                     | 580±3%       | 580±3%          | 580±3%          |
| Ave Power Consumption(W/SQM) | 174                                        | 174          | 174             | 174             |
| Maintenance Type             | Front/Rear                                 | Front/Rear   | Front/Rear      | Front/Rear      |
| Ingress Protection           | IP66/IP66                                  | IP66/IP66    | IP66/IP66       | IP66/IP66       |
| Certificate                  | CE(LVD、EMC)、ETL、3C、CB、FCC、PSE、RoHS、UL      |              |                 |                 |



## OUTDOOR SOLUTIONS

### Key Features:


- Lower carbon emission, more green!
- IP66 waterproof and 5VB fireproof.
- Self-contained heat dissipation, no need to install other heat dissipation equipment.
- High brightness option for 9,000nits.
- Totally front and rear service.
- Stable and reliable performance.




Standard Dimension: 1,000x1,000x81.5mm  
 Optional Dimensions: 1,000x500mm/1,000x750mm/1,000x1,000mm  
 Pixel pitch: 3.9mm, 4.8mm, 5.9mm, 6.2mm, 8.3mm, 10.4mm  
 Applications: Digital signage, billboard, road sign, stadium scoreboards, building facade, etc.




Die-casting Aluminum module and cabinet, for seamless installation and fast heat radiation.

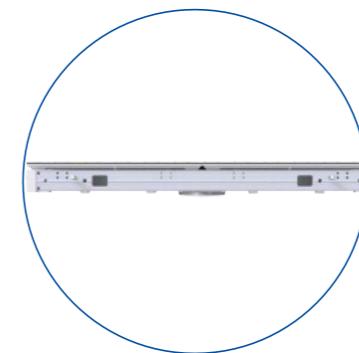

Cabinet Thickness 81.5mm  
Lightweight Cabinet 27kg/m<sup>2</sup>

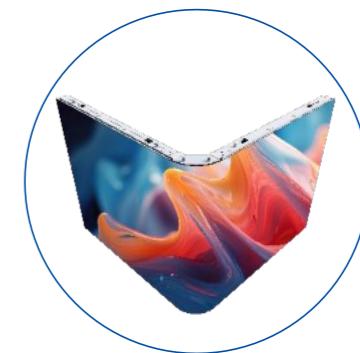

Perfect seamless corner cabinet for naked-eye 3D solution.

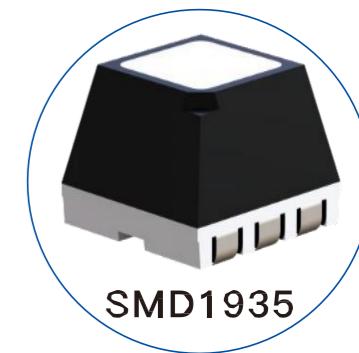

Higher brightness/Higher contrast/  
Energy-saving

| Item Number                  | P3.9                           | P4.8    | P5.9    | P6.25       | P8.33   | P10.4   |
|------------------------------|--------------------------------|---------|---------|-------------|---------|---------|
| Pixel Pitch(mm)              | 3.91                           | 4.81    | 5.95    | 6.25        | 8.33    | 10.41   |
| Pixel Density(dots/SQM)      | 65,536                         | 43,264  | 28,224  | 25,600      | 14,400  | 9,216   |
| LED Type                     | SMD1921/SMD1935                |         | SMD1921 | SMD1921     | SMD2727 | SMD2727 |
| Module Resolution(pixels)    | 128*64                         | 104*52  | 84*42   | 80*40       | 60*30   | 48*24   |
| Module Size(mm)              | 500*250                        | 500*250 | 500*250 | 500*250     | 500*250 | 500*250 |
| Cabinet Size(mm)             | 1,000*500/1,000*750/1,000*1000 |         |         |             |         |         |
| Cabinet Weight(KG/SQM)       | 27                             |         |         |             |         |         |
| Brightness(Nits)             | 5,000-7,000                    |         |         | 6,000-9,000 |         |         |
| Refreshment(Hz)              | 3,840                          |         |         |             |         |         |
| Grey Scale(Bit)              | 14-16                          |         |         |             |         |         |
| Max Power Consumption(W/SQM) | 580±3%/500±3%                  | 540±3%  | 540±3%  | 550±3%      | 550±3%  | 550±3%  |
| Ave Power Consumption(W/SQM) | 174/148                        | 162     | 162     | 165         | 165     | 165     |
| Maintenance Type             | Front/Rear                     |         |         |             |         |         |
| Ingress Protection           | IP66/IP66                      |         |         |             |         |         |
| Certificate                  | CE(LVD、EMC)、CB、FCC、ETL         |         |         |             |         |         |

# LED VIDEO SCREEN PR


## OUTDOOR SOLUTIONS

### Key Features:

- 400x300mm Aluminum module design for 16:9 Golden Ratio.
- IP66 waterproof and 5VB fireproof.
- Support Power and signal back up.
- Common cathode technology for energy-saving.
- High brightness option to 10,000nits.
- High quality components for 3 years to 5 years warranty.




Dimension: 800x1,200x86mm  
 Optional Dimensions: 800x600mm/800x900mm/800x1,200mm/1,200x600mm  
 /1,200x900mm/1,200x1,200mm/1,600x900mm  
 Pixel Pitch: 6.67mm, 8.3mm, 10mm  
 Applications: DOOH Market, Billboard Advertisement, Road Sign, Stadiums, etc.

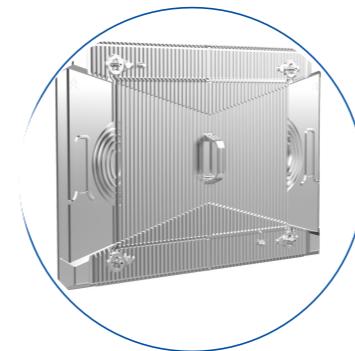

400x300mm Die-casting Aluminum module, for fast heat dissipation



Hard connection design with total front and rear service.

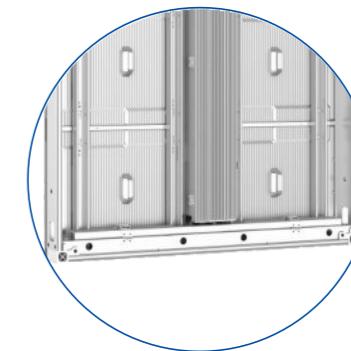

hidden cable cover, protect the power cable and signal cable from damages.



Die-casting connecting plate, for wall-mount installation directly.

| Item Number                  | P6.67                                                               | P8.3         | P10          |
|------------------------------|---------------------------------------------------------------------|--------------|--------------|
| Pixel Pitch(mm)              | 6.67                                                                | 8.3          | 10           |
| Pixel Density(dots/SQM)      | 22,500                                                              | 14,400       | 10,000       |
| LED Type                     | SMD2727                                                             | SMD2727      | SMD3535      |
| Module Resolution(pixels)    | 60*45                                                               | 48*36        | 40*30        |
| Module Size(mm)              | 400*300                                                             | 400*300      | 400*300      |
| Cabinet Size(mm)             | 800*600/800*900/800*1,200/1,200*600/1,200*900/1,200*1,200/1,600*900 |              |              |
| Cabinet Weight(KG/SQM)       | 30                                                                  | 30           | 30           |
| Brightness(Nits)             | 6,000-9,000                                                         | 6,000-10,000 | 6,000-10,000 |
| Refreshment(Hz)              | 3,840                                                               | 3,840        | 3,840        |
| Grey Scale(Bit)              | 14-16                                                               | 14-16        | 14-16        |
| Max Power Consumption(W/SQM) | 580±3%                                                              | 550±3%       | 550±3%       |
| Ave Power Consumption(W/SQM) | 174                                                                 | 165          | 165          |
| Maintenance Type             | Front/Rear                                                          | Front/Rear   | Front/Rear   |
| Ingress Protection           | IP66/IP66                                                           | IP66/IP66    | IP66/IP66    |
| Certificate                  | CE(LVD, EMC), ETL, FCC, RoHS                                        |              |              |




## OUTDOOR SOLUTIONS

### Key Features:

- Die-casting Aluminum module for fast heat dissipation.
- IP66 waterproof and 5VB fireproof.
- Common cathode technology for energy saving.
- High brightness option for 10,000nits.
- Totally front and rear service.
- Stable and reliable performance.




Standard Dimension: 1,280x960x90mm  
 Optional Dimensions: 1,280x960mm/1,280x1,280mm/960x960mm/960x1,280mm  
 Pixel pitch: 6.67mm, 8mm, 10mm  
 Applications: Digital signage, billboard, road sign, stadium scoreboards, building facade, etc.

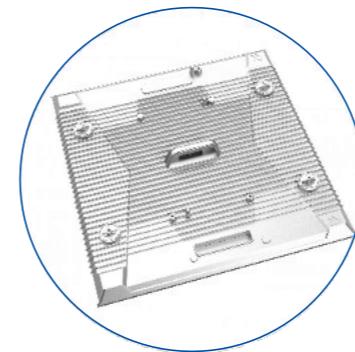

Die-casting Aluminum Module for fast heat dissipation



Hidden cable cover, protect the power cable and signal cable from damages.

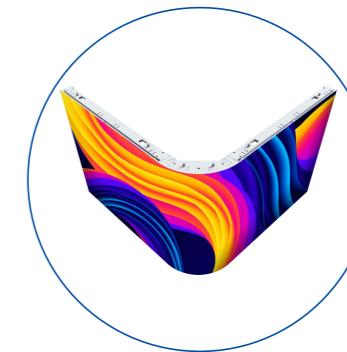

Perfect seamless corner cabinet for naked-eye 3D solution.



Die-casting connecting plate, for wall-mount installation directly.

| Item Number                  | P5.7                    | P6.67                   | P8                      | P10                     |
|------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| Pixel Pitch(mm)              | 5.71                    | 6.67                    | 8                       | 10                      |
| Pixel Density(dots/SQM)      | 30,625                  | 22,500                  | 15,625                  | 10,000                  |
| LED Type                     | SMD2727                 | SMD2727                 | SMD3535                 | SMD3535                 |
| Module Resolution(pixels)    | 56*56                   | 48*48                   | 40*40                   | 32*32                   |
| Module Size(mm)              | 320*320                 | 320*320                 | 320*320                 | 320*320                 |
| Cabinet Size(mm)             | 1280*960                | 1280*960                | 1280*960                | 1280*960                |
| Cabinet Weight(KG)           | 30                      | 30                      | 30                      | 30                      |
| Brightness(Nits)             | 6,000-9,000             | 6,000-9,000             | 6,000-10,000            | 6,000-10,000            |
| Refreshment(Hz)              | 3,840                   | 3,840                   | 3,840                   | 3,840                   |
| Grey Scale(Bit)              | 14-16                   | 14-16                   | 14-16                   | 14-16                   |
| Max Power Consumption(W/SQM) | 580±3%                  | 580±3%                  | 580±3%                  | 580±3%                  |
| Ave Power Consumption(W/SQM) | 174                     | 174                     | 174                     | 174                     |
| Maintenance Type             | Front/Rear              | Front/Rear              | Front/Rear              | Front/Rear              |
| Ingress Protection           | IP66/IP66               | IP66/IP66               | IP66/IP66               | IP66/IP66               |
| Certificate                  | CE, FCC, ETL, EMC, ROHS |



## OUTDOOR SOLUTIONS

### Key Features:


- Fine pixel pitch for outdoor fixed installation.
- Die-casting Aluminum module for fast heat dissipation.
- IP66 waterproof and 5VB fireproof.
- Easy service from front and rear side.
- High brightness option to 9,000nits.
- Stable performance for outdoor environment.



Standard Dimension: 500x1,000x81mm  
 Optional Dimensions: 500x500mm/500x750mm/500x1,000mm  
 Pixel Pitch Outdoor: 2.9mm, 3.9mm, 4.8mm, 6.25mm  
 Applications: Window Screen, Digital Signage System, Bus Station, Arena Display, Business Advertising Signs, Airport, etc.




Flexible cabinet size

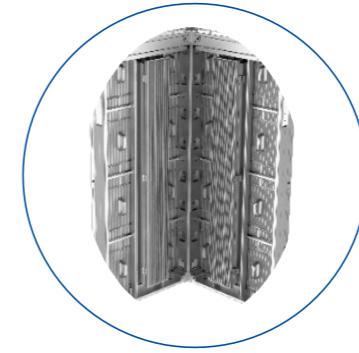

Cabinet with side cut 45degree, installed into 90 degree corner.



Cables hidden on top of cabinet, for safety and long lifespan.

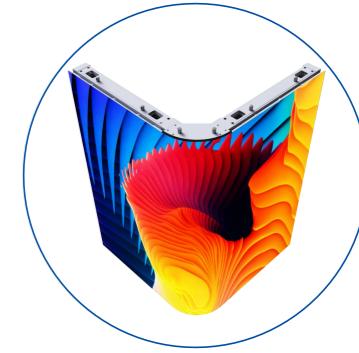

Perfect seamless corner cabinet for naked-eye 3D solution.

| Item Number                  | P2.9                     | P2.9                | P3.9        | P3.9                | P4.8                | P6.2                |
|------------------------------|--------------------------|---------------------|-------------|---------------------|---------------------|---------------------|
| Pixel Pitch(mm)              | 2.9                      | 2.9                 | 3.9         | 3.9                 | 4.8                 | 6.2                 |
| Pixel Density(dots/SQM)      | 112,896                  | 112,896             | 65,536      | 65,536              | 43,264              | 25,600              |
| LED Type                     | SMD1515 (white led)      | SMD1515 (black led) | SMD1935     | SMD1921 (white led) | SMD1921 (white led) | SMD2727 (white led) |
| Module Resolution(pixels)    | 84*84                    | 84*84               | 128*64      | 128*64              | 104*52              | 80*40               |
| Module Size(mm)              | 250*250                  | 250*250             | 500*250     | 500*250             | 500*250             | 500*250             |
| Cabinet Size(mm)             | 500*500/500*750/500*1000 |                     |             |                     |                     |                     |
| Cabinet Weight(KG/SQM)       | 38                       |                     | 36.5        |                     |                     |                     |
| Brightness(Nits)             | 4,500-5,000              | 2,500-3,000         | 6,000-8,000 | 5,000-7,000         |                     | 6,000-9,000         |
| Refreshment(Hz)              | 3,840                    |                     |             |                     |                     |                     |
| Grey Scale(Bit)              | 14-16                    |                     |             |                     |                     |                     |
| Max Power Consumption(W/SQM) | 670±3%                   | 500±3%              | 650±3%      | 570±3%              | 540±3%              | 550±3%              |
| Ave Power Consumption(W/SQM) | 201                      | 150                 | 228         | 171                 | 162                 | 165                 |
| Maintenance Type             | Front/Rear               |                     |             |                     |                     |                     |
| Ingress Protection           | IP66/IP66                |                     |             |                     |                     |                     |
| Certificate                  | CE(LVD、EMC)、CB、FCC、ETL   |                     |             |                     |                     |                     |

# LED VIDEO SCREEN PR

## OUTDOOR SOLUTIONS

### Key Features:

- Special design for outdoor high resolution screen.
- Die-casting Aluminum module and cabinet for high precision.
- Fully outdoor installation with IP66 and 5VB fireproof.
- Totally front service and rear service.
- High brightness to 5,000nits.
- Ideal solution for outdoor high-end applications.



Dimension: 500x500x66mm

Pixel Pitch: 1.9mm/2.6mm/2.9mm

Applications: Chain stores, Bus station, restaurants, Museum, Showrooms, etc.



Die-casting Aluminum cabinet, for high precise installation.



Cables hidden on top of cabinet, for safety and long lifespan.



Various installation type like Rigging, stacking, wall-mounted, etc.



Hard connection design, total front and rear service.

| Item Number                  | P1.95                  | P2.6                   | P2.97                  |
|------------------------------|------------------------|------------------------|------------------------|
| Pixel Pitch(mm)              | 1.95                   | 2.6                    | 2.97                   |
| Pixel Density(dots/SQM)      | 262,144                | 147,456                | 112,896                |
| LED Type                     | SMD1212                | SMD1212                | SMD1515                |
| Module Resolution(pixels)    | 128*128                | 96*96                  | 84*84                  |
| Module Size(mm)              | 250*250                | 250*250                | 250*250                |
| Cabinet Size(mm)             | 500*500                | 500*500                | 500*500                |
| Cabinet Weight(KG)           | 9                      | 8.5                    | 8.5                    |
| Brightness(Nits)             | 3,500-4,500            | 3,500-4,500            | 4,500-5,000            |
| Refreshment(Hz)              | 3,840                  | 3,840                  | 3,840                  |
| Grey Scale(Bit)              | 14-16                  | 14-16                  | 14-16                  |
| Max Power Consumption(W/SQM) | 600±3%                 | 600±3%                 | 600±3%                 |
| Ave Power Consumption(W/SQM) | 210                    | 210                    | 210                    |
| Maintenance Type             | Front/Rear             | Front/Rear             | Front/Rear             |
| Ingress Protection           | IP66/IP66              | IP66/IP66              | IP66/IP66              |
| Certificate                  | CE, FCC, ETL, EMC, PSE | CE, FCC, ETL, EMC, PSE | CE, FCC, ETL, EMC, PSE |

# LED VIDEO SCREEN PR

## SPORTS SOLUTION

### Key Features:

- Platinum 960x960mm cabinets with Aluminum modules.
- Top rubber cover, soft mask for protection.
- Rotatable base, easy for installation.
- Side lock system.
- High refreshment for live broadcast.
- Cable-free back side, total front & rear service.



Dimension: 960x960x95mm  
 Pixel Pitch: 8mm/10mm  
 Applications: All kinds of stadiums.



Soft mask for protection players.



Top rubber cover, stable and ultraviolet-proof.



Rotatable base, easy for installation.



Side lock and side handle.

| Item Number                  | P8                                        | P10                                       |
|------------------------------|-------------------------------------------|-------------------------------------------|
| Pixel Pitch(mm)              | 8                                         | 10                                        |
| Pixel Density(dots/SQM)      | 15,625                                    | 10,000                                    |
| LED Type                     | SMD3535                                   | SMD3535                                   |
| Module Resolution(pixels)    | 60*40                                     | 48*32                                     |
| Module Size(mm)              | 480*320                                   | 480*320                                   |
| Cabinet Size(mm)             | 960*960                                   | 960*960                                   |
| Cabinet Weight(KG)           | 31                                        | 31                                        |
| Brightness(Nits)             | 6,000                                     | 6,000                                     |
| Refreshment(Hz)              | 3,840                                     | 3,840                                     |
| Grey Scale(Bit)              | 14-16                                     | 14-16                                     |
| Max Power Consumption(W/SQM) | 550±3%                                    | 550±3%                                    |
| Ave Power Consumption(W/SQM) | 165                                       | 165                                       |
| Maintenance Type             | Front/Rear                                | Front/Rear                                |
| Ingress Protection           | IP66/IP66                                 | IP66/IP66                                 |
| Certificate                  | CE(LVD, EMC), ETL, 3C, CB, FCC, PSE, RoHS | CE(LVD, EMC), ETL, 3C, CB, FCC, PSE, RoHS |




## SPORTS SOLUTION

### Key Features:

- UEFA standard design.
- 1,600x900mm cabinet size.
- Players' protective design.
- Emergency access design.
- Rotatable base.
- Dolly design for storage of cabinets.



Dimension: 1,600x900x86mm  
 Pixel Pitch: 6.67mm/8.3mm/10mm  
 Application: All kinds of stadiums.

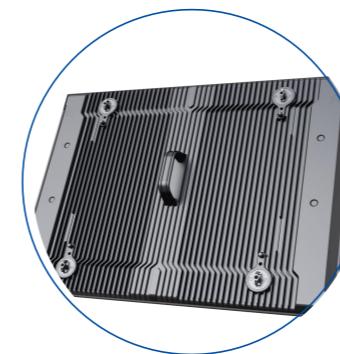

400x300mm Aluminum module



Rotatable base



Top rubber cover and soft mask.



Dolly design for storage of cabinets.

| Item Number                  | P6.67                                       | P8.33                        | P10                          |
|------------------------------|---------------------------------------------|------------------------------|------------------------------|
| Pixel Pitch(mm)              | 6.67                                        | 8.33                         | 10                           |
| Pixel Density(dots/SQM)      | 22,500                                      | 14,400                       | 10,000                       |
| LED Type                     | SMD2727                                     | SMD2727                      | SMD3535                      |
| Module Resolution(pixels)    | 60*45                                       | 48*36                        | 40*30                        |
| Module Size(mm)              | 400*300                                     | 400*300                      | 400*300                      |
| Cabinet Size(mm)             | 800*900/800*1,200/1,600*900                 |                              |                              |
| Cabinet Weight(KG)           | 800*900: 27kg/800*1200: 34kg/1600*900: 52kg |                              |                              |
| Brightness(Nits)             | 6,000                                       | 6,000                        | 6,000                        |
| Refreshment(Hz)              | 3,840                                       | 3,840                        | 3,840                        |
| Grey Scale(Bit)              | 14-16                                       | 14-16                        | 14-16                        |
| Max Power Consumption(W/SQM) | 580±3%                                      | 550±3%                       | 550±3%                       |
| Ave Power Consumption(W/SQM) | 174                                         | 165                          | 165                          |
| Maintenance Type             | Front/Rear                                  | Front/Rear                   | Front/Rear                   |
| Ingress Protection           | IP66/IP66                                   | IP66/IP66                    | IP66/IP66                    |
| Certificate                  | CE(LVD, EMC), ETL, FCC, RoHS                | CE(LVD, EMC), ETL, FCC, RoHS | CE(LVD, EMC), ETL, FCC, RoHS |



## SPORTS SOLUTION

### Key Features:

- Customized design for stadium ribbon display.
- 750x750mm Aluminum cabinet size, light weight.
- Handles on the top, easy to pull the cabinet up with safety wire.
- Simple and strong back frame, attached onto the wall directly.
- Totally front service and taken-out service.
- Slop cover design, Prevent the audience from putting things on it.




Dimension: 750x750x81mm  
 Pixel pitch: 3.9mm  
 Applications: All kinds of stadiums.



Top handles' design, easy to take the cabinets out from the top.



Simple frame installed into the wall directly, then put the cabinets onto the frame.

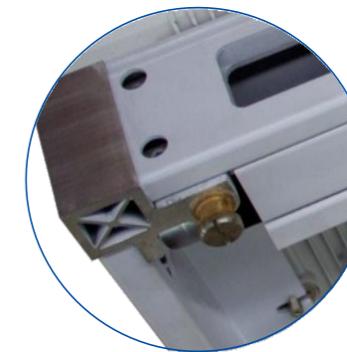

Position pin on the cabinets, easy to locate into the frame.



Ideal product for stadium ribbon display.

| Item Number                  | P3.91       |
|------------------------------|-------------|
| Pixel Pitch(mm)              | 3.91        |
| Pixel Density(dots/SQM)      | 65,536      |
| LED Type                     | SMD1921     |
| Module Resolution(pixels)    | 96*64       |
| Module Size(mm)              | 375*250     |
| Cabinet Size(mm)             | 750*750     |
| Cabinet Weight(KG/SQM)       | 30          |
| Brightness(Nits)             | 5,000-7,000 |
| Refreshment(Hz)              | 3,840       |
| Grey Scale(Bit)              | 14-16       |
| Max Power Consumption(W/SQM) | 570±3%      |
| Ave Power Consumption(W/SQM) | 171         |
| Maintenance Type             | Front/Rear  |
| Ingress Protection           | IP66/IP66   |

# LED VIDEO SCREEN PR

## PROFESSIONAL OUTDOOR ADVERTISING PLAYER

### Key Features:

- Die-casting Aluminum module and cabinet.
- RGB Deep grayscale processing.
- Stable and Reliable.
- Centralized Control.
- Easy Installation and Maintenance.



Dimension: 1,200x2,700x230mm  
 Pixel pitch: 1.9mm/2.9mm  
 Applications: Stations, airports, parking lots, streets, communities, parks, pedestrian streets, etc.



Exquisite Picture Quality



Stable and Reliable



Integrated Solutions




Cluster Control



Automatic Brightness Adjustment

| Item Number                  | P1.95       | P2.6        | P2.97       |
|------------------------------|-------------|-------------|-------------|
| Pixel Pitch(mm)              | 1.95        | 2.6         | 2.97        |
| Pixel Density(dots/SQM)      | 262,144     | 147,456     | 112,896     |
| LED Type                     | SMD1212     | SMD1212     | SMD1515     |
| Module Resolution(pixels)    | 128*128     | 96*96       | 84*84       |
| Display Dimension (W*H, mm)  | 1,000*2,000 | 1,000*2,000 | 1,000*2,000 |
| Cabinet Size(mm)             | 1,200*2,700 | 1,200*2,700 | 1,200*2,700 |
| Cabinet Weight(KG)           | 260         | 260         | 260         |
| Brightness(Nits)             | 3,000-4,000 | 3,000-4,000 | 4,800-5,300 |
| Refreshment(Hz)              | 3,840       | 3,840       | 3,840       |
| Grey Scale(Bit)              | 14-16       | 14-16       | 14-16       |
| Max Power Consumption(W/SQM) | 560±3%      | 560±3%      | 560±3%      |
| Ave Power Consumption(W/SQM) | 168         | 168         | 168         |
| Maintenance Type             | Front/Rear  | Front/Rear  | Front/Rear  |
| Ingress Protection           | IP65/IP65   | IP65/IP65   | IP65/IP65   |

## Perfect round corner for 3D effect solution

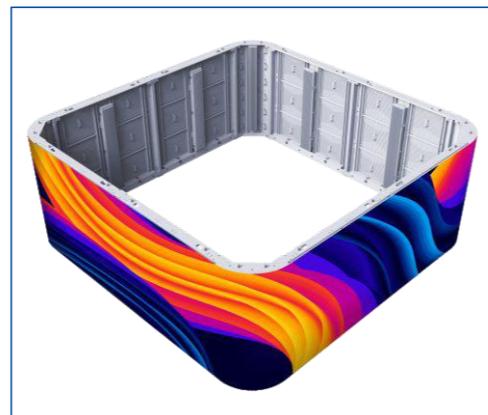

Corner size: 480mmx960mm/480mmx640mm  
 Matched for: Platinum Series 5.7mm/6.67mm/8mm/10mm  
 Platinum A Series 6.67mm/8mm/10mm  
 Platinum320 Series 5.7mm/6.6mm

## Perfect round corner for 3D effect solution



Corner size: 250mmx1000mm/250mmx750mm/250mmx500mm  
 Matched for: Platinum S Series 2.9mm/3.9mm/4.8mm  
 PTS A Series 3.9mm  
 PTF Series 3.9mm/4.8mm



### The GATE

The Gate perfectly represents the 2023 Bergamo - Brescia a project —a capital city in which culture also encompasses the value of local businesses and their innovative potential, capable of fostering growth of people and communities. The Platinum S2.9mm perfectly shows the beauty of two cities !



Westfield Arkadia at Warsaw, Poland



Moncloa Station At Madrid, Spain



Germany

## Cases



### VIKING FK, NORWAY

Viking FK is one of the largest football clubs in Norway. Situated in Stavanger, Viking is recognized as the team for the entire South - West region of Norway. Viking FK has a long successful history including the club winning 8 league championships and 5 cup trophies. This famous stadium is equipped with a whole system, including a 250 - meter - long 10mm sports screen and two scoreboards sized 9.6m x 5.44m.



## Cases



### AFC , OMAN NATIONAL STADIUM

Six systems of 10mm perimeter system have been provided for AFC (Asian Football Confederation). The latest one was installed for Oman National Stadium. So far, 10mm perimeter systems have been installed for national stadiums in Germany, France, Netherlands, Japan, USA, etc.

